



Kiosk Tablets Manual

Kiosk Mode Pin Number: **8741**

Important instructions within - When you receive your tablet you will need to;

- 1) Connect to wifi
- 2) Change web browser home page
- 3) Clear Cache
- 4) Ensure tablet launches in kiosk mode as standard

www.blackboxav.co.uk

www.interpretationshop.co.uk


CONTENTS

EXITING KIOSK MODE - CONNECTING TO THE INTERNET	3
CHANGE WEBSITE / WHITELIST	6
CLEARING THE CACHE.....	7

EXITING KIOSK MODE - CONNECTING TO THE INTERNET


Both Tablets connect to a single website in kiosk mode as standard from boot, the first thing you will need to do when you receive your tablets is connect them to the local WiFi. To access the settings and connect to the WiFi you will first need to exit kiosk mode;

Tap anywhere on the screen **8** times to bring up the following prompt;

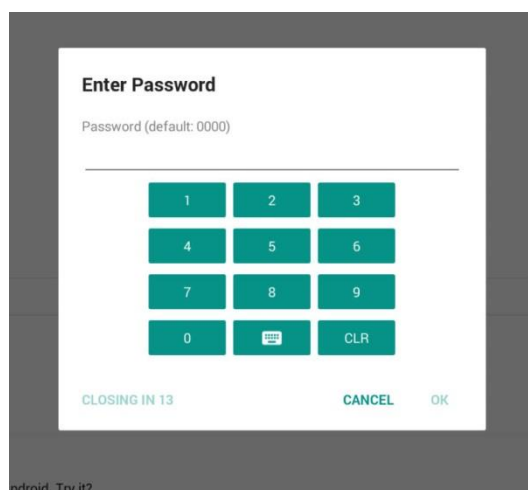

The Pin Number is set to: **8741**



This will take you through to the Kiosk applications settings area. To exit the app select the top right icon;

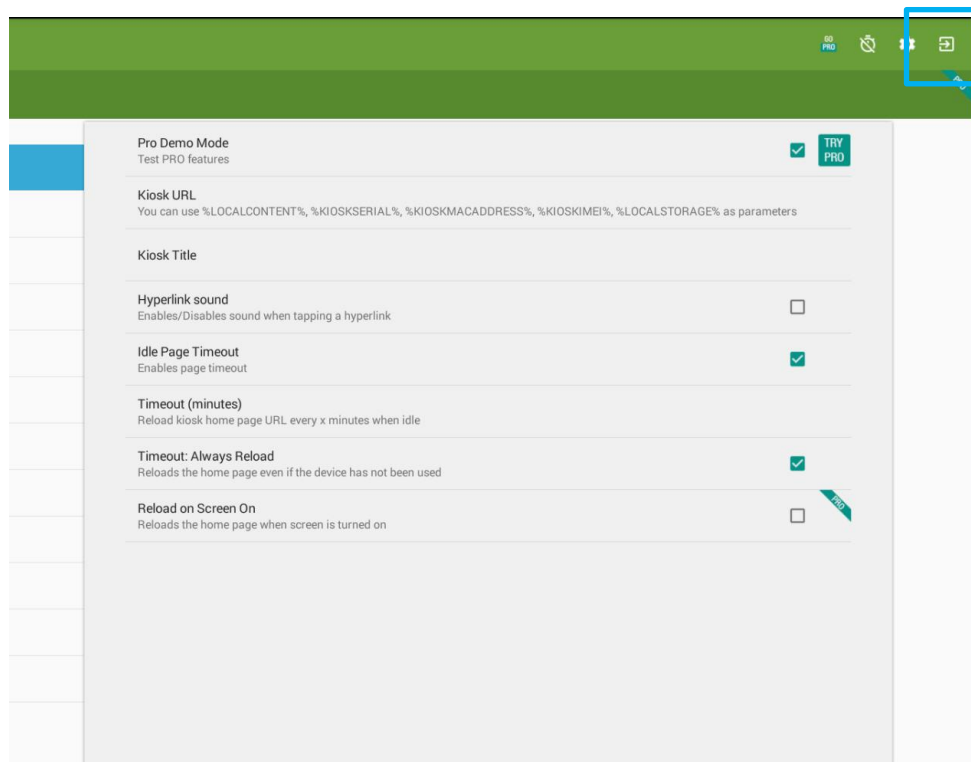

This will then bring up the following prompt where you can choose to 'run Launcher3', which will take you to the tablet menu. Select 'Just Once';

www.blackboxav.co.uk

www.interpretationshop.co.uk

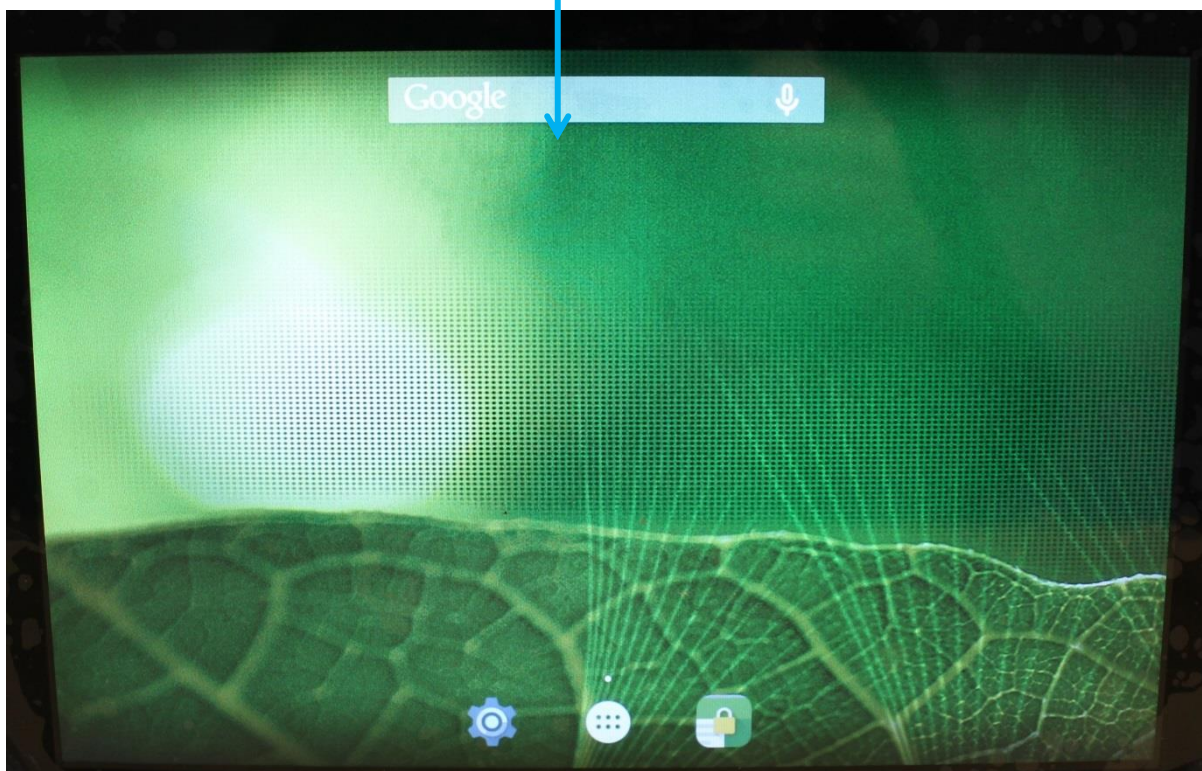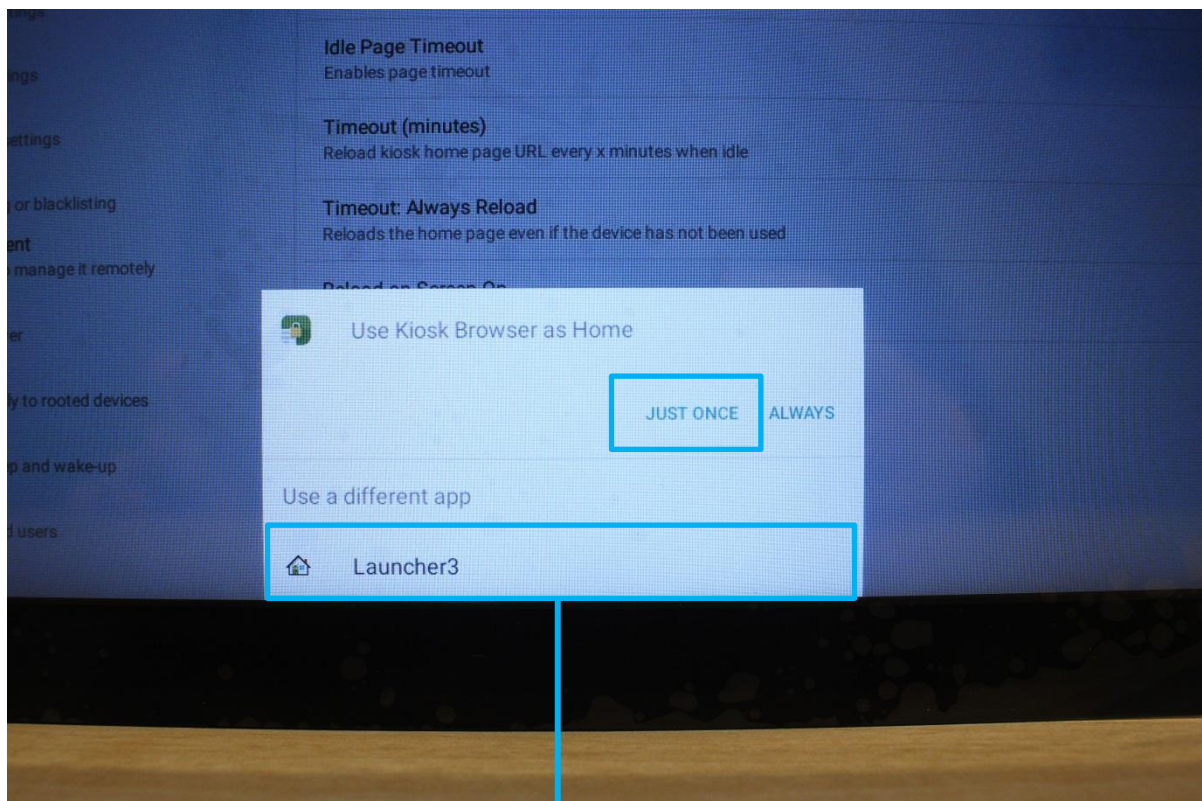

Once you have exited from the application, select the '**Cog**' icon to access the kiosk settings.

This is a standard Android device and works as such, in the '**Settings**' screen you can select the '**Wi-Fi**' option and connect your tablet to the internet.

*NOTE: The usual navigation buttons you see on an Android device have been disabled for kiosk purposes, to exit the settings menu and go back to the home screen you will need to use the supplied **remote control** using the '**back**' and '**home**' buttons.*




(!) Launch Kiosk Mode by selecting the '**Kiosk Browser**' Icon, you will be prompted to run this '**JUST ONCE**' or '**ALWAYS**' when you do so, select '**ALWAYS**' to ensure kiosk mode starts as standard when the tablet is powered up.


CHANGE WEBSITE / WHITELIST

The Kiosks are currently connected to the test site: **http://toynbeehall.staging.wpengine.com/**
Once this site goes live it will need to be changed to: **http://www.toynbeehall.org.uk/**

You do this by accessing the settings section of the kiosk software as above, however do not exit the software this time instead navigate to the first tab **'General'** and set the URL in **'Kiosk URL'**

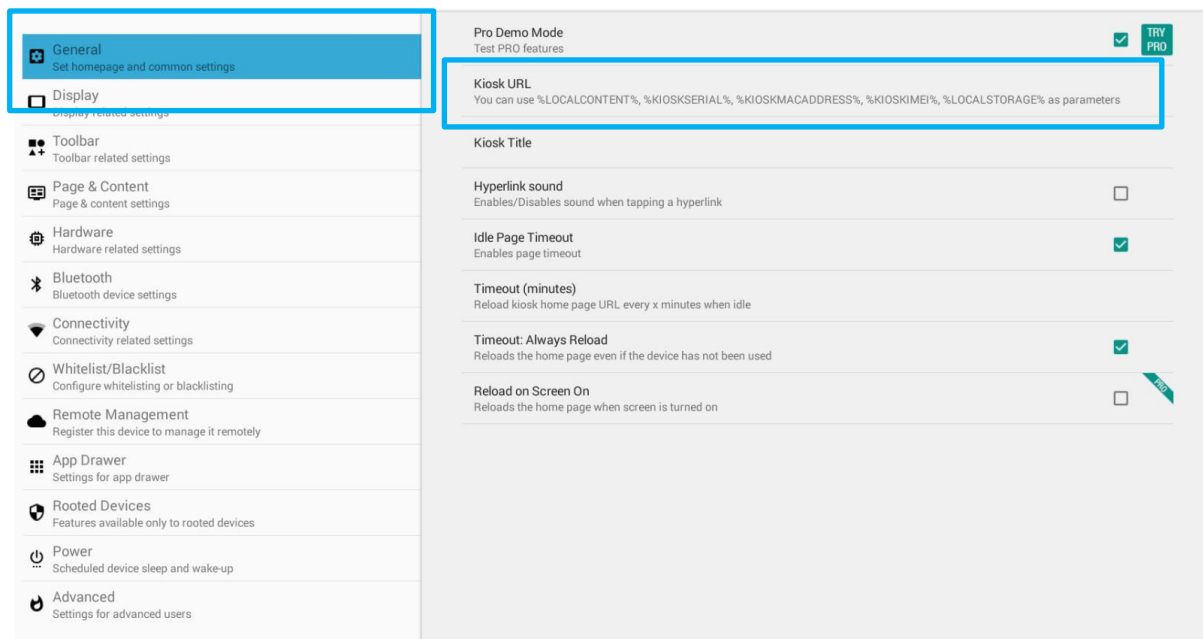

Enter the new URL here;

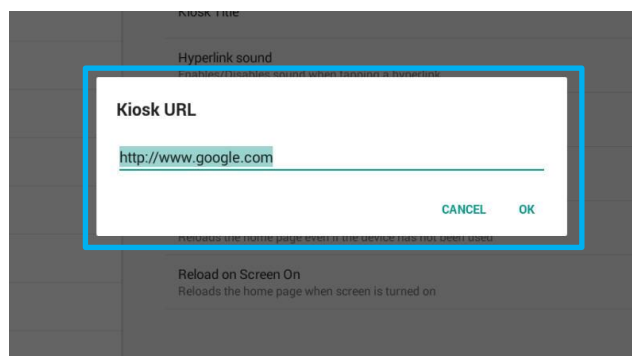

Once you set the new website you may need to add this to the **'Whitelist'** of allowed sites. These can be found in the **'Whitelist / Blacklist'** settings, simply add the new website to the **'Whitelist URLs'** section. Note we have already added both **'toynbeehall.staging.wpengine.com/**, **www.toynbeehall.org.uk/**' to the whitelist.


www.blackboxav.co.uk

www.interpretationshop.co.uk

CLEARING THE CACHE

There are a number of settings within the Kiosk Software however the only settings you should need to interact with are the Home Website (as above) and to clear the cache once you do this.

To clear the cache go to **Admin** in settings;

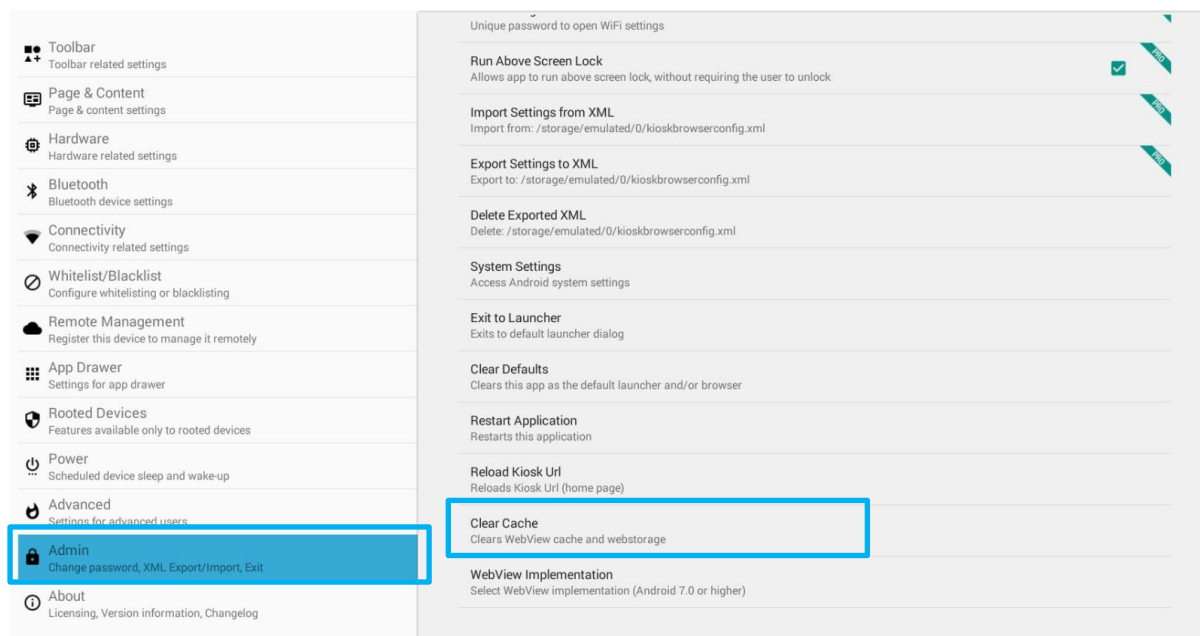

And select 'Clear Cache'.